


PLANKING TIPS

Volume 17

AUGUST, 1990.

No.

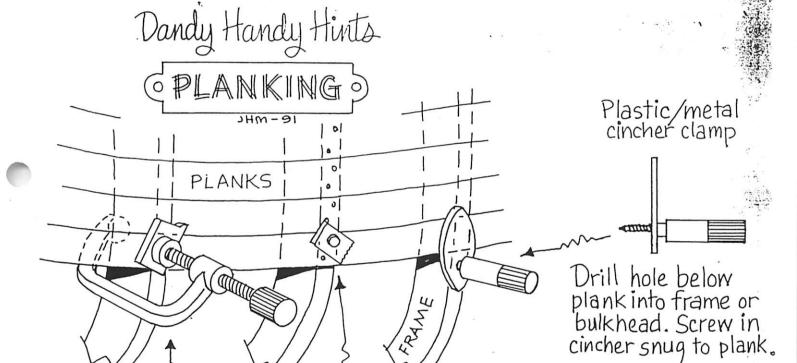

There are many styles & sizes of "C" clamps. Use a small scrap of soft wood to prevent clamp from denting plank.

P.S. The shoulder of a push-pin works well also ----

If planks are to be pegged you can drill peg holes & also drill a hole through a small piece of wood scrap. Drive in a small nail snug to the plank. When glue is dry, split the scrap with a knife, remove & pull out nail with needle-nose pliers. Then peg.

August Meeting

Wednesday, August 15, 1990.